

Sophisticated RIP software maximizes the performance of JV400 series

RasterLink6

Additional useful functions

User friendly RIP key features

- Easy to follow icons enable intuitive and user-friendly operation
- Related settings feature in one window to simplify RIP operations, with 'Register as Favourite' option available for regularly used layouts
- Printing progress can be monitored on the main screen

1. Three ink layers in one pass print function

A three-layer print of colour, white and colour can be performed at one time. Printing a base layer 'underlay' of white ink allows perfect reproduction of beautiful natural colours when printing on transparent media. Window graphics can be printed with high precision and no multi-pass colour registration shift.

2. Layout function

Three ink layers or copied images are freely laid out if print conditions remain the same. This function reduces the media waste by efficient layout.

3. Multi-profile, simultaneous printing function

Several profiles that match conditions can be simultaneously printed. This is particularly useful for test output when the profile for a target image quality or colour requires multiple 'profile' test prints.

*To be supported by RasterLink6 program update.

Specifications

| Item | JV400-130/160SUV | |
|-------------------------|---|--|
| Head | On-demand Piezo head (Array of 2 heads in-line) | |
| Maximum width | 1,361 mm / 1,610 mm | |
| Print resolution | 600, 900, 1200dpi | |
| Print speed | High speed | 18.1 m ² /h (900 × 900 dpi, 6 pass, bi-directional, 4 colour) |
| | Standard | 14.2 m ² /h (900 × 1200dpi, 8 pass, bi-directional, 4 colour) |
| Ink | SU100 Solvent UV ink | 4 colour (C, M, Y, K) |
| | Ink supply system | 600 ml ink pack |
| Media | Width | Up to 1,371 mm / 1,620 mm |
| | Weight | Up to 25 kg |
| | Roll diameter | Up to φ180 mm |
| | Inside roll diameter | 2-3 inch |
| | Print aspect | Inside / outside |
| Cutter | Y-direction cutter after head section | |
| Drying device | 3 way intelligent heater (Pre/Print/After) | |
| UV curing unit | Equipped with fluorescent UV tube lamp | |
| Media take-up device | Roll take-up device, inside/outside selectable | |
| Interface | USB2.0 | |
| Applicable standard | VCCI class A, FCC class A, UL 60950-1 CE Marking (EMC, Low voltage and Machinery directive) CB Report | |
| Power specification | AC 100-240V±10% / AC 200-240V±10% | |
| Power consumption | 100-120V:1,440W x 2 / 220-240V:1,800W x 2 | |
| Operational environment | Temperature: 20°C-30°C (68-86°F); Humidity: 35-65 % RH (non condensing) | |
| Dimensions (WxDxH) | 2,630×855×1,435mm / 2,875×855×1,435mm | |
| Weight | 241kg / 259kg | |

Supplies

| Item | Item No. | Remarks |
|----------------------|-----------|------------|
| SU100 Solvent UV ink | Cyan | SU100-C-60 |
| | Magenta | SU100-M-60 |
| | Yellow | SU100-Y-60 |
| | Black | SU100-K-60 |
| Eco cartridge | OPT-J0237 | 8 cases |

600 ml ink pack requires eco cartridge (OPT-J0237).
Eco cartridges can be used repeatedly by replacing ink packs.

Related Product

New LX100 Latex Ink on board
JV400-130/160LX

Eco-friendly water-based ink

The water-based "LX100" has very little VOC (Volatile Organic Compound) and does not need special ventilating equipment. This is an eco-friendly ink which reduces the operator's environmental impact.

World's First Latex White Ink

The white ink meets the diverse needs of a signage market with its adaptability to a wide range of printing media including transparent PET, window decoration, shatterproof window film and so on. In addition, the machine comes with ink circulation system, named MCT*, prevents pigment sedimentation and provides stable ink-jetting.

*MCT = Mimaki Circulation Technology

Available in all scenes outdoors or indoors

Latex ink can print on most medias that are used in eco-solvent machines. Moreover, non-coated media without an acceptance layer, such as paper and cloth, can be printed on as well. This excellent media capability opens the door to many opportunities.

Fixing method of Latex Ink

Discharge

Resin film

Media

Resin and pigment in the ink are applied simultaneously

Resin dissolves forming membrane.

It is heated to about 60 °C with heater

Pigment is fixed

No drying time, Immediate shift to post-processing

C M Y K O G W

• Some of the samples in this folder are artificial renderings • Specifications, design and dimensions stated in this folder may be subject to change without notice (for technical improvements, etc.)
• The corporate and merchandise names written on this folder are the trademark of the respective corporations • Inkjet printers print using extreme fine dots, so colours may vary after replacement of the printing heads, also note that if using multiple printer units, colours could vary slightly from one unit to other unit due to slight individual differences • Composer's errors reserved

JV400 Series
JV400-130 SUV / JV400-160 SUV



Solvent UV inkjet printer...

Mimaki

www.mimakieurope.com info@mimakieurope.com @MimakiEurope

Mimaki Europe B.V. Stammerdijk 7E, 1112 AA Diemen, The Netherlands Tel: +31 (0)20 4627640



SIGN & GRAPHICS



eco

Mimaki

The world imagines... Mimaki delivers



the power to

create...



A brighter, faster, solvent UV printer

The JV400 SUV series sets new industry standards by combining the flexibility of solvent printing with the durability of UV cured inks, resulting in smooth, glossy prints, which simulate the appearance of being coated yet retaining the colour brightness expected from a solvent printer. These characteristics, coupled with a high resistance to scratching and weathering are designed to satisfy even the most demanding of customers.

ENGINEERING EXCELLENCE AND CREATIVE INNOVATION

Founded in Japan in 1975, Mimaki Engineering has steadily grown by reputation and influence into a global company with large operational bases in Asia and the Pacific, United States and Europe.

Renowned for award-winning performance, peerless build quality and innovative technology, Mimaki has established itself as a leading manufacturer of wide-format inkjet printers and cutting machines for the sign and graphics, textile and apparel and industrial markets. In addition, Mimaki also provides a comprehensive range of supporting products; hardware, software and associated consumable items, such as inks and cutting blades.

From outdoor signage and billboards to interior decoration and furnishing, from packaging and labels to promotional gifts and apparel, Mimaki is committed to developing technology that sets new industry standards, producing machines and products that turn the imagination of our customers into breath-taking reality.

... Mimaki delivers

JV400 – 130/160 SUV delivers ...


- Solvent UV inks for a smooth, glossy finish with brilliant colour definition
- High level of resistance to scratching and weathering
- Fast drying inks for improved productivity
- 4 colour printing
- High print durability for outdoor or indoor applications
- High speed output at up to 18.1 m² per hour
- Choice of two print widths (1371 mm or 1620 mm)
- Prints exit machine completely dry, ready for immediate post-processing

- SOLVENT UV INKS**
- SMOOTH, GLOSSY PRINTS**
- HIGH SCRATCH RESISTANCE & DURABILITY**
- 18.1 m²/h MAX. PRINT SPEED**
- LOW INK CURING TEMPERATURES**
- 2 PRINT WIDTHS**
- 4 COLOUR PRINT**

JV400 Series
JV400-130 SUV / JV400-160 SUV



Fixing method of SUV ink

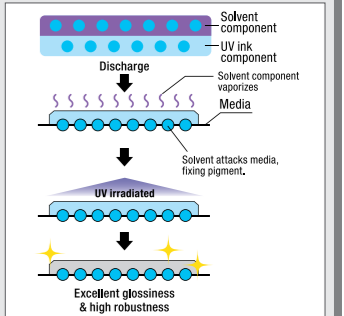

Fail-safe functions for continuous operation


- **Nozzle Recovery Function**
Even when nozzle washing has no effect on troubled nozzle, the print image quality can be recovered temporarily.
* Nozzle Recovery Function is a temporary failure averting function and its recoverability is limited.
- **Uninterrupted Ink Supply System**
Two ink cartridges per colour are set in 4-colour mode. When the ink level of one cartridge is almost empty, the ink supply automatically switched to another cartridge of the same colour, preventing from stopping a print job due to running out of ink.

Create ... Indoor and Outdoor Signage and Display Graphics, Banners or any wide format application where high definition and durability are a key requirement...

KEY TECHNICAL FEATURES ...

High-speed print head


New, technically advanced printhead provides 4 picolitre minimum capability.



Two newly developed print heads with four rows of 320 nozzles per head are arranged in-line. The result is top quality, high speed printing.

Variable ink dot technology

Depending on media or output density, the drop sizes of ink from the print head can be selected down to a minimum of 4 pico litres. Multidrop function provides three different drop sizes at once, producing fascinating, non-grainy and smooth print results.

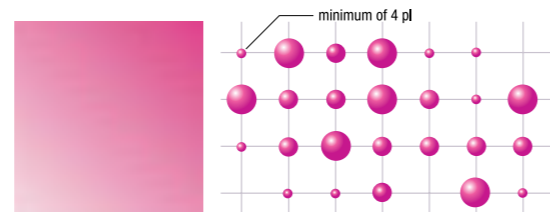

Advanced ink technology

Solvent UV ink contains both solvent and UV ink components. Solvent component results in smooth, glossy prints with brilliant colour definition, while UV component contributes to its durability and high level of resistance to scratching and weathering.

Improved drying device for the colour reproduction fixability of ink

3 Way Intelligent Heater improves the colour reproduction and fixability of ink by heating the media to the proper temperature before, during and after printing. In combination with the 3 Way Intelligent Heater, the UV curing unit immediately cures the ink to be fixed.

Drying time eliminated by immediate print curing

When using Mimaki Solvent UV inks, fixation and curing is immediate, eliminating drying times. Immediately after printing, secondary processing, such as lamination can be performed, dramatically improving production times and efficiency.

- 1 Keeps the temperature constant & prevents UV light leak
- 2 Immediately cures with UV lamp

